

LL-BURST 3in1 optic

LED high power pendant | specifications

80W - 120W - 180W

■ BLACK

CRI >90 IP42



SPECIFICATIONS

Installation Type: High power pendant

Power: 80W - 120W - 180W

Light source: Nichia SMD LED

Lamp luminous flux 120W-PW: 16200 lm

Optic: High transmittance lens

Beam angle: Adjustable 3 in 1 optic (60°-80°-90°)

CRI >80 (>90 on request)

CCT: 3000K(WW) - 4000K(NW) - 5000K(PW)

Optic: PMMA low glare

LED Driver: MeanWell driver on board

Input: 220 - 240 Vac / 50-60 Hz

Operating Temperature: -35° ÷ + 45° C

IP grade: IP42

Insulation class: I





Material: Die cast magnesium alloy
Surface treatment: Surface anti-ageing and shockproof electrostatic spray processing

Finish: Black

Dimension: Ø 270 x H 130 mm


Accessories: Diffusing lampshade to avoid direct glare

DIMENSION

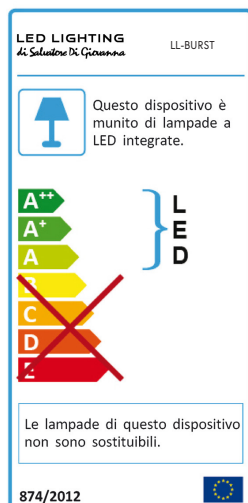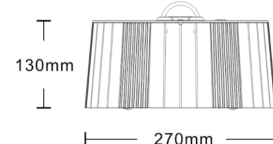

Energy label

CERTIFICATIONS



PRODUCT CODE

LL-BURST-X-X¹-X²-X³-X⁴

X POWER: 80 / 120 / 180

X¹ FINISH: B

X² CCT : WW / NW / PW

X⁴ CRI : 80 / 90

X⁴ ACCESSORIES: - / HDF

