


STRIP LED HYPER 19.2 W/m

SMD2110 | 19.2 W/m | 700 led/m | PCB 8 mm | CRI>90




STRIP LED LINEA CONTINUA

LED STRIP CONTINUOUS LINE

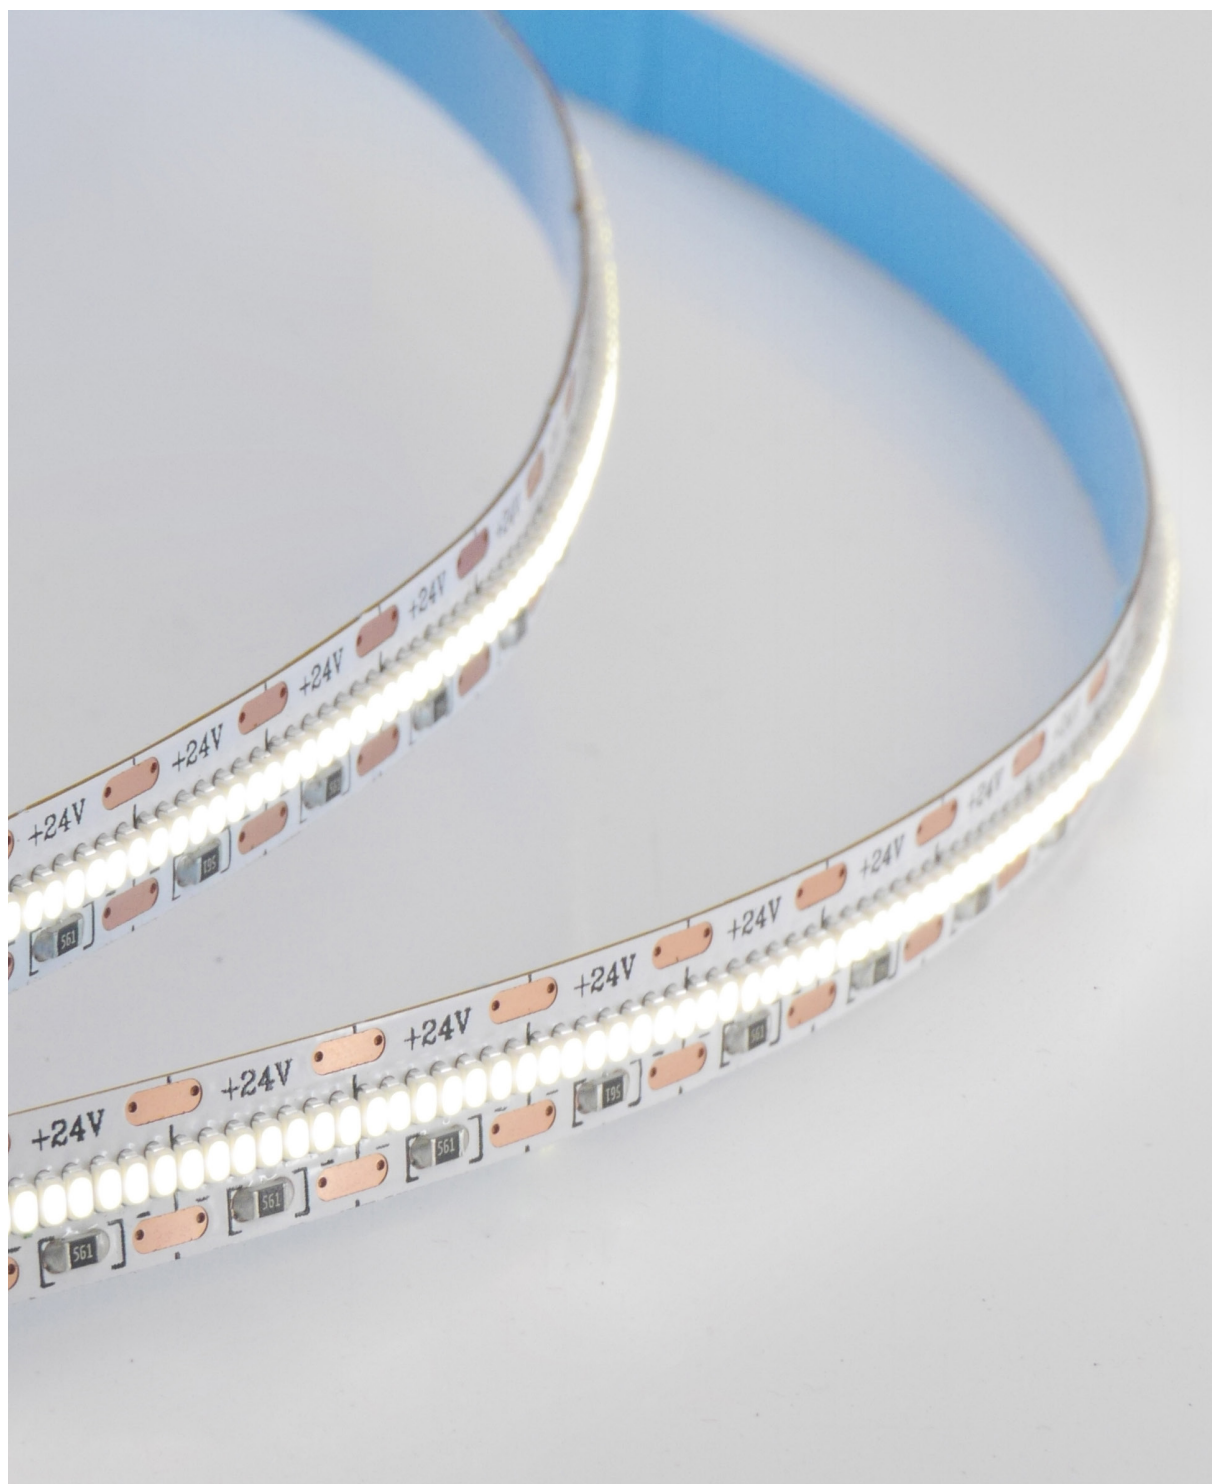

SMD2110 | 19.2 W/m | 700 led/m | PCB 8 mm | CRI>90


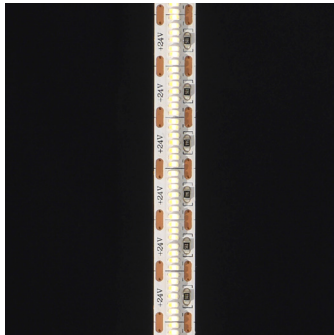


Prodotto: Strip LED flessibile linea continua di luce
 Potenza: 19.2 W/m
 Installazione: Tramite adesivo sul retro, è raccomandata l'installazione su di un profilo in alluminio dissipante
 Sorgente luminosa: SMD 2110
 PCB: 2 OZ doppio strato di rame
 CRI > 90
 CCT: 2700K - 3000K - 4000K
 Flusso luminoso: [NW] 2300 lm/m
 Angolo del fascio luminoso: 120°
 Grado di protezione IP: IP20
 Input: 24 Vdc
 Classe di isolamento: Classe III
 Driver: Esterno, da ordinare separatamente
 Quantità LED: 700 led/m - 3500 led/roll
 Lunghezza roll: 5 m
 Distanza di taglio: 9.96 mm
 Larghezza PCB: 8 mm
 Certificazioni: CE - Conforme alla norma EN 60598-1 e relative note

*Product: LED flexible strip continuous line of light
 Power: 19.2 W/m
 Installation: By adhesive on the back, installation on a dissipating aluminum profile is recommended
 Light source: SMD 2110
 PCB: 2 OZ double-layer of copper
 CCT: 2700K - 3000K - 4000K
 Luminous flux: [NW] 2300 lm/m
 CRI > 90
 Beam angle: 120°
 IP protection degree: IP20
 Input: 24 Vdc
 Insulation class: Class III
 Driver: External, to be ordered separately
 LED quantity: 700 led/m - 3500 led/roll
 Roll length: 5 m
 Cutting length: 9.96 mm
 PCB width: 8 mm
 Certifications: CE - Compliant with EN 60598-1 and related notes*



DIMENSIONI / DIMENSION

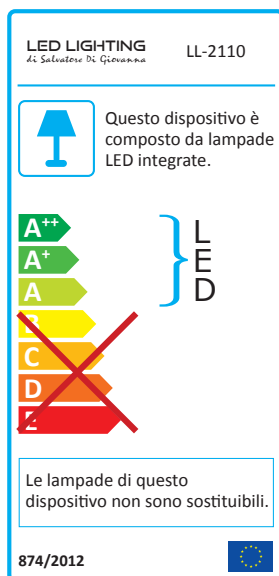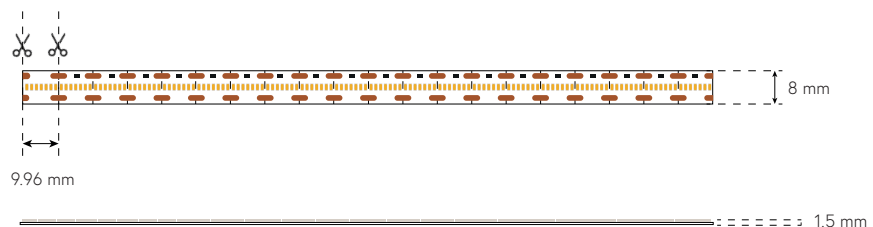

Etichetta energetica
 Energy label

CODICE PRODOTTO

PRODUCT CODE

LL-HD-HYPER-19.2-X¹-X²-X³

X POTENZA - POWER: 19.2
 X¹ CCT : SW / WW / NW
 X² GRADO IP - IP GRADE: 20
 X³ INPUT: 24

Revision date: 01/2020