


LL-EPIC 300 RT

FARETTO LED DA INCASSO A SOFFITTO TRIMLESS

LED TRIMLESS RECESSED DOWNLIGHT



10W - 15W

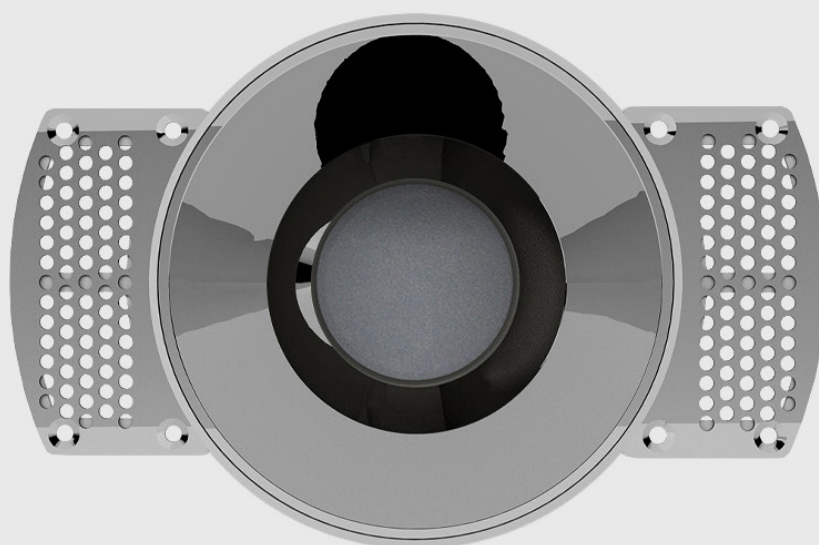

LL-EPIC 300 RT

LED TRIMLESS RECESSED DOWNLIGHT | Specifications

10W - 15W





BLACK / WHITE / NICKEL / GOLD




Prodotto: Faretto da incasso a soffitto trimless
Vano ottico orientabile: 355°, Inclinazione 30°
Potenza: 10W - 15W
Materiale: Corpo in alluminio, riflettore in materiale plastico finitura opaca o lucida
Sorgente luminosa: COB LED
Optic: Lente in PMMA, ottica arretrata
UGR<10 - da tabella UGR globale
CCT: 2700K - 3000K - 4000K
CRI>90
Flusso luminoso (WW):
10W: 498 lm
15W: 748 lm
Angolo di emissione: 15° - 24° - 36° - 60°
Finitura: Bianco opaco, nero opaco, nichel riflettente, oro riflettente
Grado di protezione IP: IP20
Driver: Esterno, incluso
Controllo: ON-OFF - 0-10V - DALI - TRIAC
Input apparecchio 10W: 34-36 Vdc / 250 mA
Input apparecchio 15W: 34-36 Vdc / 350 mA
Classe di isolamento: Classe II
Dimensioni: Ø 83 x 122 mm
Foro installazione: Ø 85 mm
Certificazioni: CE - Conforme alla norma EN 60598-1 e relative note

*Product: Trimless recessed downlight
Adjustability: 355°, Tilting 30°
Power: 10W - 15W
Material: Aluminum body, reflector in plastic material, matte or reflective finish
Light source: COB LED
Optic: PMMA lens, recessed optic
UGR<10 - from global UGR table
CCT: 2700K - 3000K - 4000K
CRI>90
Luminous flux (WW):
10W: 498 lm
15W: 748 lm
Beam angle: 15° - 24° - 36° - 60°
Finish: Matt white, matt black, reflective nickel, reflective gold
IP rating: IP20
Driver: External, included
Control: ON-OFF - 0-10V - DALI - TRIAC
Luminaire input 10W: 34-36 Vdc / 250 mA
Luminaire input 15W: 34-36 Vdc / 350 mA
Insulation class: Class II
Size: Ø 83 x 122 mm
Cut: Ø 85 mm
Certifications: CE - Compliant with EN 60598-1 and related notes*

DIMENSIONI / DIMENSION


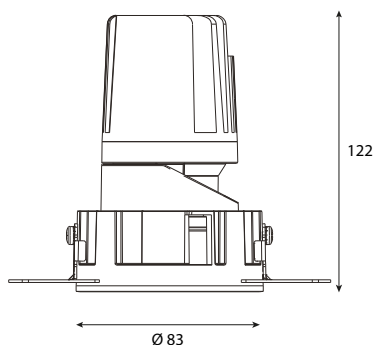


DATI FOTOMETRICI / PHOTOMETRIC DATA

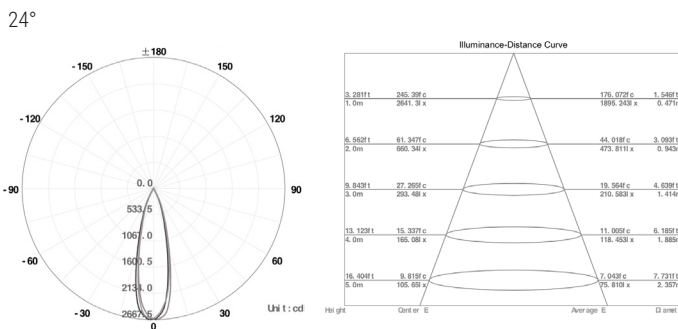

OPZIONI / OPTIONS

FINISH ACCESSORIES

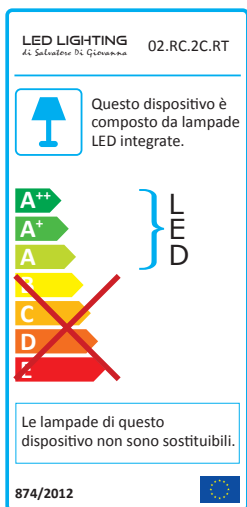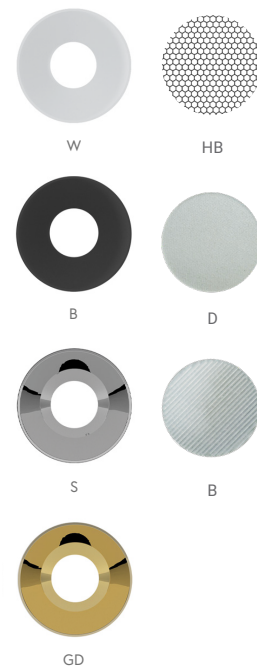

Etichetta energetica
Energy label

CODICE PRODOTTO

PRODUCT CODE

LL-EPIC-X-X¹-X²-X³-X⁴-X⁵-X⁶

X MODEL POWER: 310 10W - 315 15W

X¹ INSTALLATION FRAME: RT - Round Trimless

X² REFLECTOR FINISH: S - GD - W - B

X³ CCT: SW - WW - NW

X⁴ OPTIC: 15° - 25° - 36° - 60°

X⁵ OPTICAL ACCESSORIES: HB Honeycomb - B Blade - D Diffusing

X⁶ CONTROL: 1 ON-OFF - 2 0-10V - 3 DALI - 4 TRIAC

Codice identificativo - identification code: 10W - 02.RC.2C.RT.1 / 15W - 02.RC.2C.RT.5

Revision date: 05/2021