



LL-EPIC 300 Q

FARETTO LED DA INCASSO A SOFFITTO CON BATTUTA

LED RECESSED DOWNLIGHT WITH RIM





10W - 15W

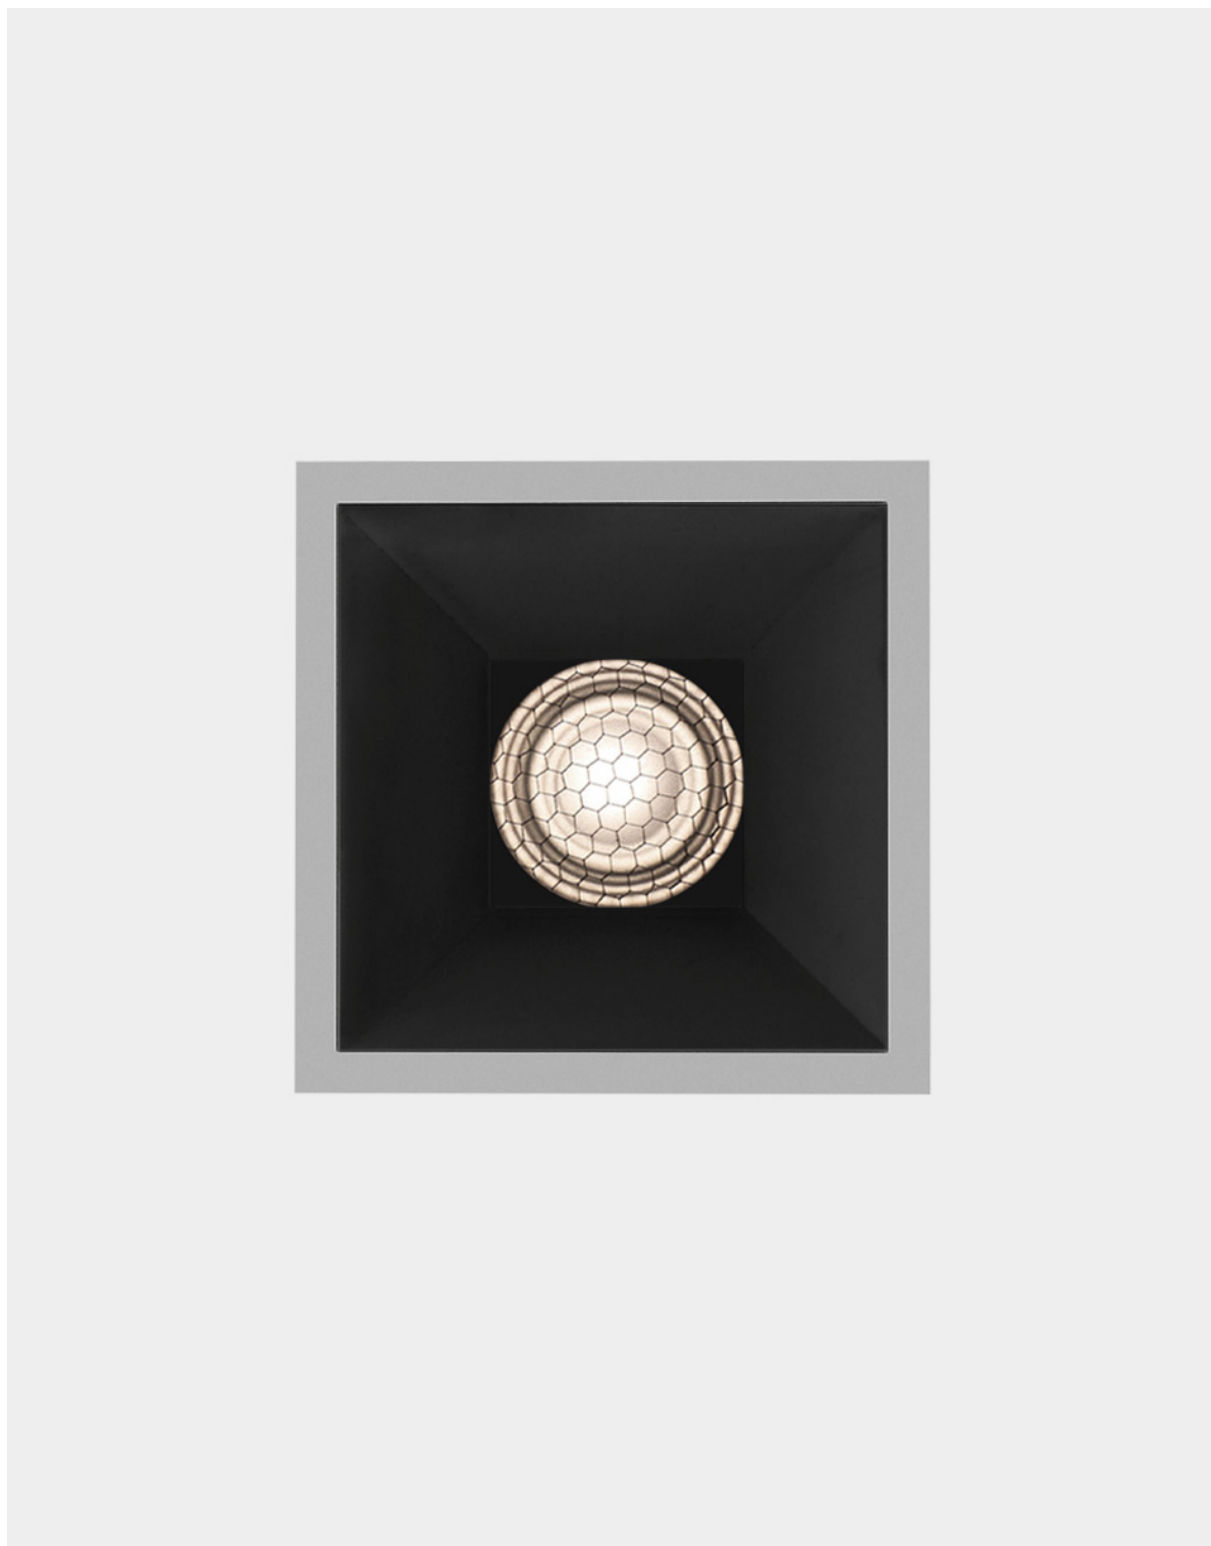

10W - 15W


■ □ ■ ■ BLACK / WHITE / NICKEL / GOLD

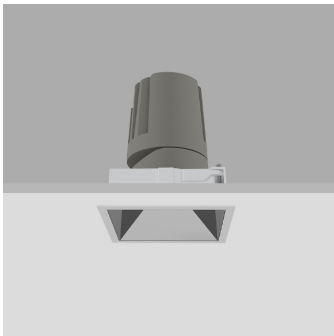

Prodotto: Faretto da incasso a soffitto con battuta
 Vano ottico orientabile: 355°, Inclinazione 30°
 Potenza: 10W - 15W
 Materiale: Corpo in alluminio, riflettore in materiale
 plastico finitura opaca o lucida
 Sorgente luminosa: COB LED
 Optic: Lente in PMMA, ottica arretrata
 UGR<10 - da tabella UGR globale
 CCT: 2700K - 3000K - 4000K
 CRI>90
 Flusso luminoso (WW):
 10W: 498 lm
 15W: 748 lm
 Angolo di emissione: 15° - 24° - 36° - 60°
 Finitura: Bianco opaco, nero opaco, nichel riflettente,
 oro riflettente
 Grado di protezione IP: IP20
 Driver: Esterno, incluso
 Controllo: ON-OFF - 0-10V - DALI - TRIAC
 Input apparecchio 10W: 34-36 Vdc / 250 mA
 Input apparecchio 15W: 34-36 Vdc / 350 mA
 Classe di isolamento: Classe II
 Dimensioni: 93 x 93 x 122 mm
 Foro installazione: 85 x 85 mm
 Certificazioni: CE - Conforme alla norma
 EN 60598-1 e relative note


Product: Recessed downlight with rim
Adjustability: 355°, Tilting 30°
Power: 10W - 15W
Material: Aluminum body, reflector in plastic material,
matte or reflective finish
Light source: COB LED
Optic: PMMA lens, recessed optic
UGR<10 - from global UGR table
CCT: 2700K - 3000K - 4000K
CRI>90
Luminous flux (WW):
10W: 498 lm
15W: 748 lm
Beam angle: 15° - 24° - 36° - 60°
Finish: Matt white, matt black, reflective nickel,
reflective gold
IP rating: IP20
Driver: External, included
Control: ON-OFF - 0-10V - DALI - TRIAC
Luminaire input 10W: 34-36 Vdc / 250 mA
Luminaire input 15W: 34-36 Vdc / 350 mA
Insulation class: Class II
Size: 93 x 93 x 122 mm
Cut: 85 x 85 mm
Certifications: CE - Compliant with EN 60598-1
and related notes

DIMENSIONI / DIMENSION

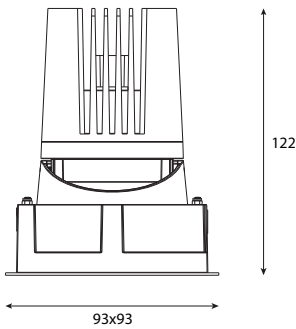


85x85

DATI FOTOMETRICI / PHOTOMETRIC DATA

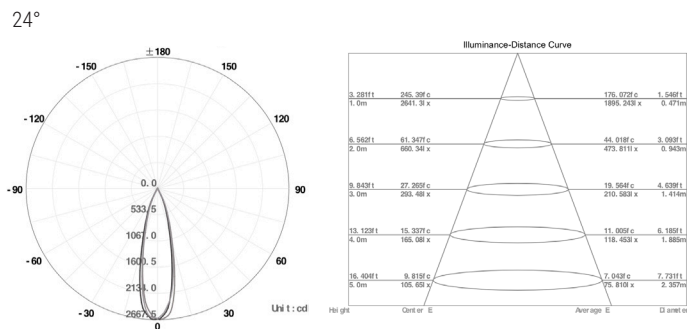

OPZIONI / OPTIONS

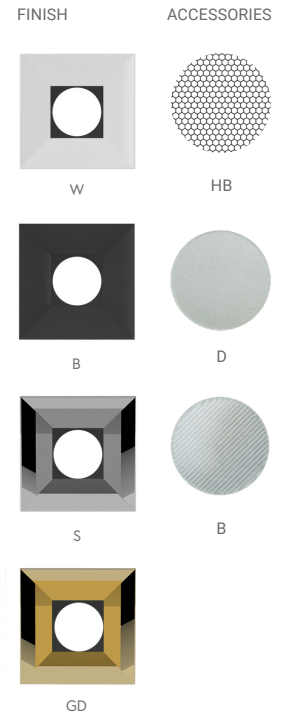

CODICE PRODOTTO

PRODUCT CODE

LL-EPIC-X-X¹-X²-X³-X⁴-X⁵-X⁶

X MODEL POWER: 310 10W - 315 15W

X¹ INSTALLATION FRAME: Q - Square with rim

X² REFLECTOR FINISH: S - GD - W - B

X³ CCT: SW - WW - NW

X⁴ OPTIC: 15° - 25° - 36° - 60°

X⁵ OPTICAL ACCESSORIES: HB Honeycomb - B Blade - D Diffusing

X⁶ CONTROL: 1 ON-OFF - 2 0-10V - 3 DALI - 4 TRIAC

Revision date: 08/2021