



LL-EPIC 500 RT

FARETTO LED DA INCASSO A SOFFITTO TRIMLESS

LED TRIMLESS RECESSED DOWNLIGHT




15W - 20W - 30W

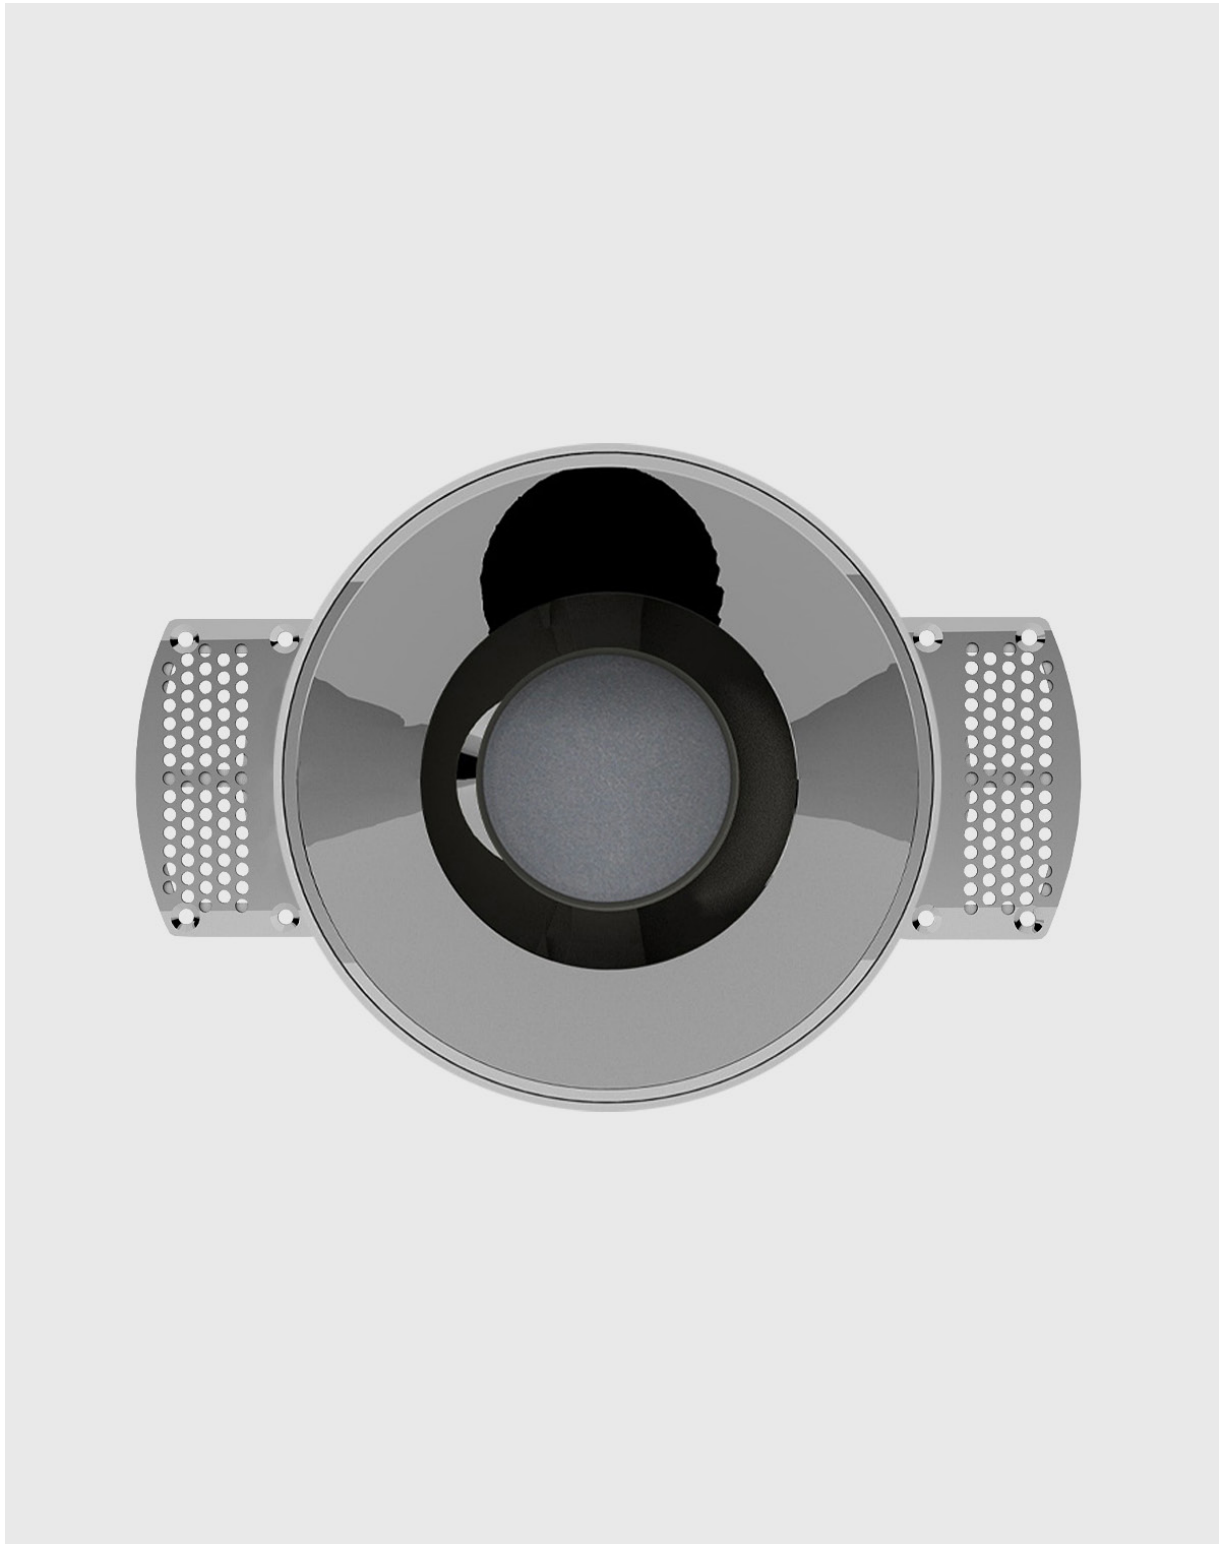

15W - 20W - 30W


BLACK / WHITE / NICKEL / GOLD



Prodotto: Faretto da incasso a soffitto trimless
 Vano ottico orientabile: 355°, Inclinazione 30°
 Potenza: 15W - 20W - 30W
 Materiale: Corpo in alluminio, riflettore in materiale plastico finitura opaca o lucida
 Sorgente luminosa: COB LED
 Optic: Lente in PMMA, ottica arretrata
 UGR<16 - da tabella UGR globale
 CCT: 2700K - 3000K - 4000K / CRI>90
 Flusso luminoso (WW):
 15W: 748 lm
 20W: 1143 lm
 30W: 1602 lm
 Angolo di emissione: 15° - 24° - 36° - 60°
 Finitura: Bianco opaco, nero opaco, nichel riflettente, oro riflettente
 Grado di protezione IP: IP20
 Driver: Esterno, incluso
 Controllo: ON-OFF - 0-10V - DALI - TRIAC
 Input apparecchio 15W: 34-36 Vdc / 350 mA
 Input apparecchio 20W: 34-36 Vdc / 500 mA
 Input apparecchio 30W: 34-36 Vdc / 700 mA
 Classe di isolamento: Classe II
 Dimensioni: Ø 123 x 170 mm
 Foro installazione: Ø 125 mm
 Certificazioni: CE - Conforme alla norma EN 60598-1 e relative note

Product: Trimless recessed downlight
Adjustability: 355°, Tilting 30°
Power: 15W - 20W - 30W
Material: Aluminum body, reflector in plastic material, matte or reflective finish
Light source: COB LED
Optic: PMMA lens, recessed optic
UGR<16 - from global UGR table
CCT: 2700K - 3000K - 4000K / CRI>90
Luminous flux (WW):
15W: 748 lm
20W: 1143 lm
30W: 1602 lm
Beam angle: 15° - 24° - 36° - 60°
Finish: Matt white, matt black, reflective nickel, reflective gold
IP rating: IP20
Driver: External, included
Control: ON-OFF - 0-10V - DALI - TRIAC
Luminaire input 15W: 34-36 Vdc / 350 mA
Luminaire input 20W: 34-36 Vdc / 500 mA
Luminaire input 30W: 34-36 Vdc / 700 mA
Insulation class: Class II
Size: Ø 123 x 170 mm
Cut: Ø 125 mm
Certifications: CE - Compliant with EN 60598-1 and related notes


DIMENSIONI / DIMENSION

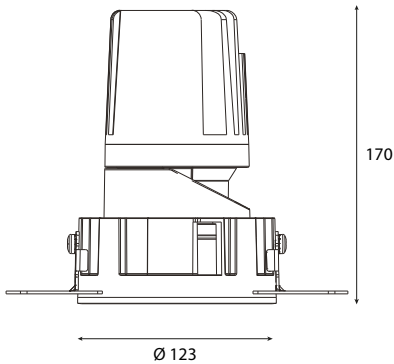

Ø 123




Ø 125




DATI FOTOMETRICI 30W / PHOTOMETRIC DATA 30W

24°

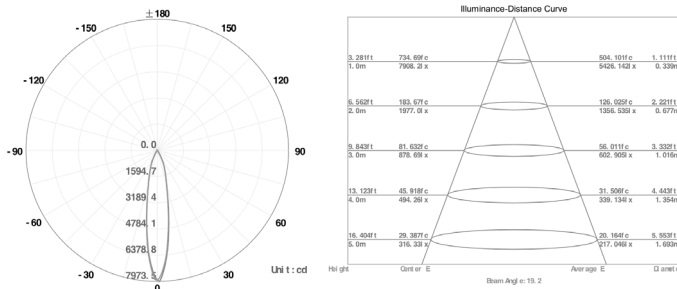

OPZIONI / OPTIONS

FINISH ACCESSORIES

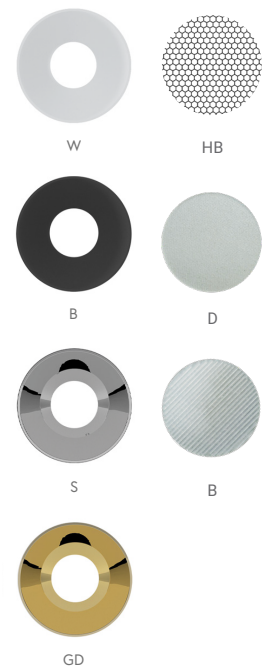

CODICE PRODOTTO

PRODUCT CODE

LL-EPIC-X-X¹-X²-X³-X⁴-X⁵-X⁶

X MODEL POWER: 515 15W - 520 15W - 530 30W

X¹ INSTALLATION FRAME: RT - Round Trimless

X² REFLECTOR FINISH: S - GD - W - B

X³ CCT: SW - WW - NW

X⁴ OPTIC: 15° - 25° - 36° - 60°

X⁵ OPTICAL ACCESSORIES: HB Honeycomb - B Blade - D Diffusing

X⁶ CONTROL: 1 ON-OFF - 2 0-10V - 3 DALI - 4 TRIAC

Revision date: 08/2021