

# LL-FOCUS-O RGBW

PROIETTORE LED DA ESTERNO

LED FLOODLIGHT FOR OUTDOOR



12W



12W | IP66


METALLIC GREY




Prodotto: Proiettore LED da esterno RGBW  
 Potenza: 12W  
 Inclinazione: 90°  
 Opzioni di installazione: Base (B) - Picchetto (PK), Staffa (BRK), Palo (PL1-PL2)  
 Materiale: Pressofusione di alluminio e vetro temperato ad alto spessore  
 Sorgente luminosa: 3 x chip LED 4in1 integrato  
 CCT(W): 4000K=RGBWW - 3000K=RGBNW / CRI >80  
 Angolo di emissione: 15° - 20° - 30° - E (45°/20°)  
 Flusso luminoso [\*WW]: 1121 lm  
 Finitura: Grigio metallizzato  
 Grado di protezione IP: IP66  
 Input: DC24V  
 Controllo: DMX512  
 Classe di isolamento: Classe III  
 Dimensioni:  
 FOCUS-O-B: 115 x H 216 x 160 mm  
 FOCUS-O-PK: 108 x H 470 x 160 mm  
 FOCUS-O-BRK: 120 x H 154 x 160 mm  
 FOCUS-O-PL1: 259 x H 170 x 108 mm  
 FOCUS-O-PL2: 254 x H 160 x 108 mm  
 Certificazioni: CE - Conforme alla norma EN 60598-1 e relative note

Product: LED floodlight RGBW for outdoor  
 Power: 12W  
 Tilting: 90°  
 Mounting options: Base (B) - Spike (PK), Bracket (BRK), Pole (PL1-PL2)  
 Material: Die-casting aluminum and tempered high thickness glass  
 Light source: 3 x integrated LED 4in1 chip  
 CCT(W): 4000K=RGBWW - 3000K=RGBNW / CRI >80  
 Beam angle: 15° - 20° - 30° - E (45°/20°)  
 Luminous flux [\*WW]: 1121 lm  
 Finish: Metallic grey  
 IP rating: IP66  
 Input: DC24V  
 Control: DMX512  
 Insulation class: Class III  
 Dimension:  
 FOCUS-O-B: 115 x H 216 x 160 mm  
 FOCUS-O-PK: 108 x H 470 x 160 mm  
 FOCUS-O-BRK: 120 x H 154 x 160 mm  
 FOCUS-O-PL1: 259 x H 170 x 108 mm  
 FOCUS-O-PL2: 254 x H 160 x 108 mm  
 Certifications: CE - Compliant with EN 60598-1 and related notes


FOCUS-O-B




FOCUS-O-PK




FOCUS-O-BRK



FOCUS-O-PL1/PL2

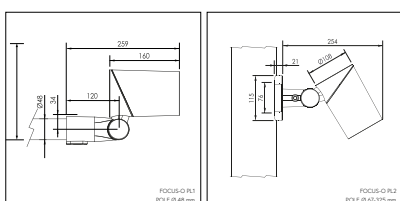


DATI FOTOMETRICI / PHOTOMETRIC DATA (\*3000K - 20°)

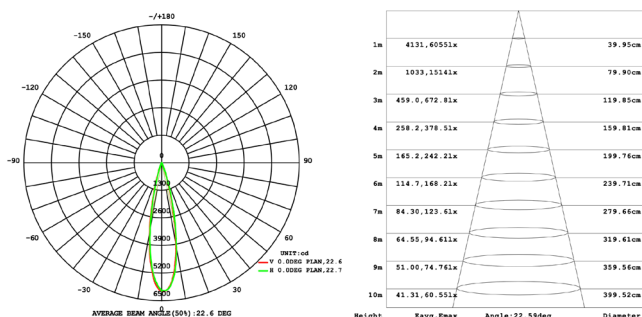

\* This data are referring to the model FOCUS-O single white 3000K

ANGOLO DI EMISSIONE / BEAM ANGLE



CODICE PRODOTTO

PRODUCT CODE

LL-FOCUS-O-X-X<sup>1</sup>-X<sup>2</sup>-X<sup>3</sup>-X<sup>4</sup>-X<sup>5</sup>

X INSTALLAZIONE / INSTALLATION: B - PK - BRK - PL1 - PL2

X<sup>1</sup> POTENZA / POWER: 12

X<sup>2</sup> CCT: RGBWW / RGBNW

X<sup>3</sup> FINITURA / FINISH: G

X<sup>4</sup> ANGOLO DI EMISSIONE / BEAM ANGLE: 15° - 20° - 30° - E

X<sup>5</sup> CONTROLLO / CONTROL: DMX

Revision date: 08/2021