


LL-FOCUS

PROIETTORE LED DA ESTERNO
LED FLOODLIGHT FOR OUTDOOR



10W

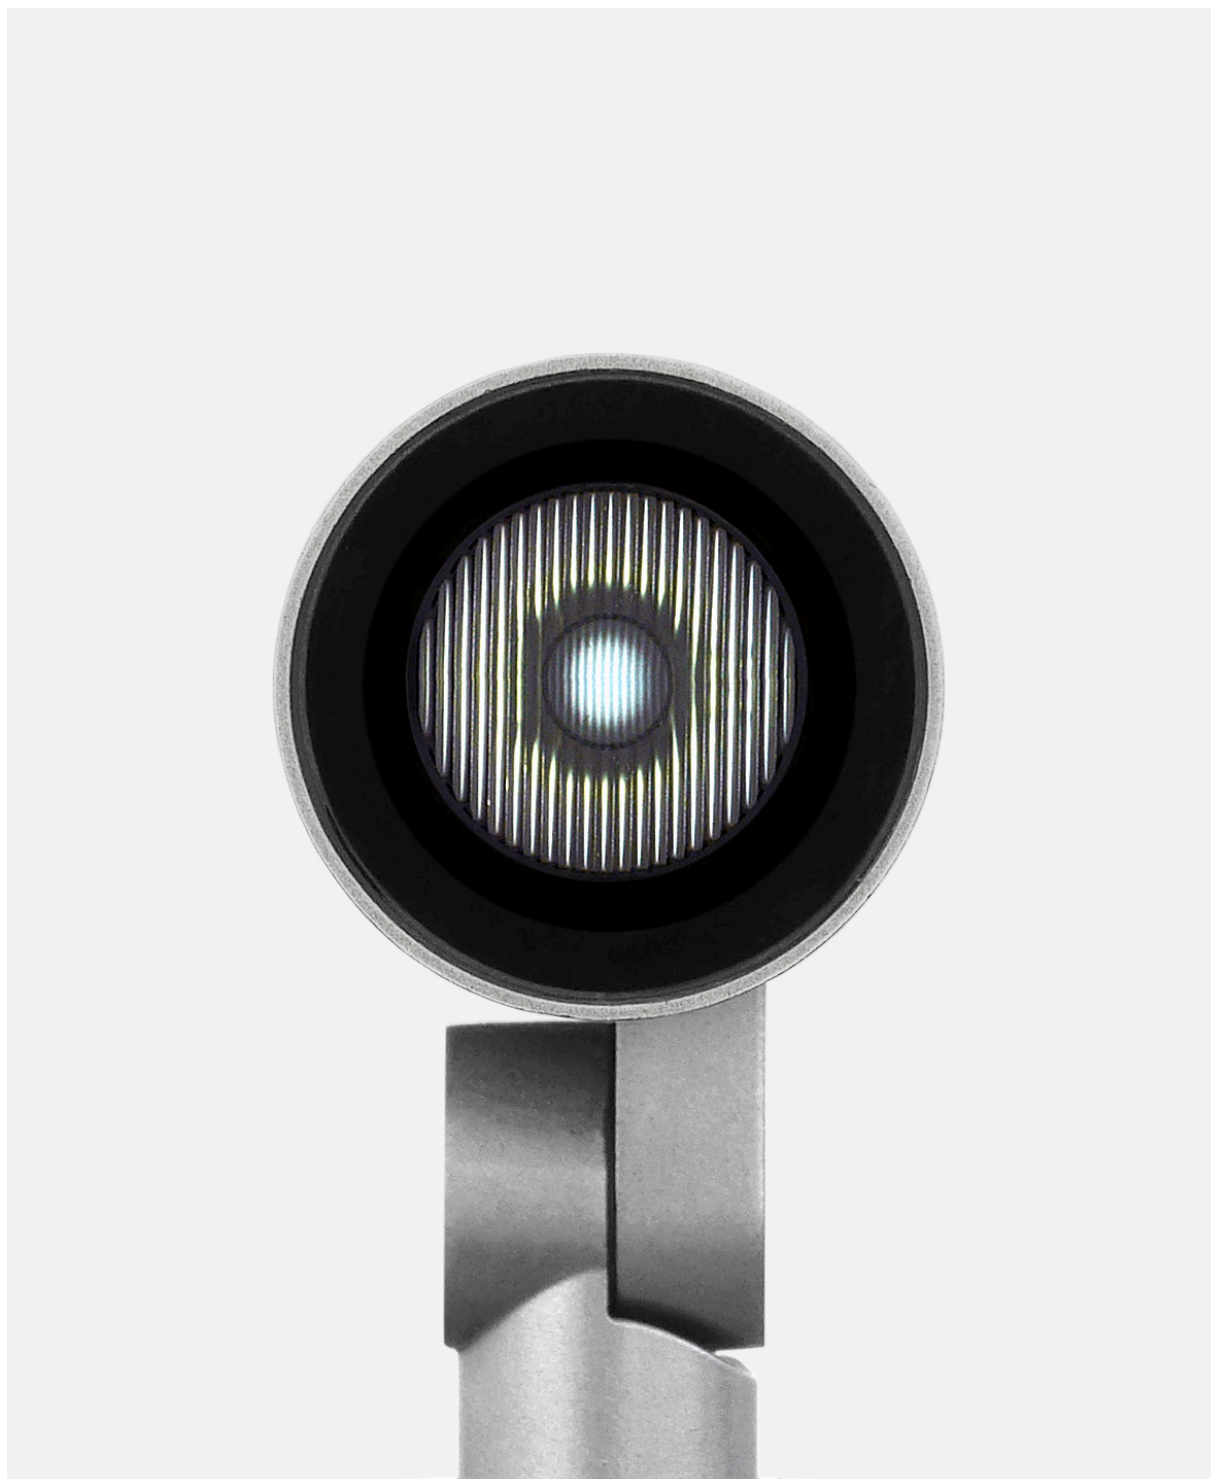


10W | IP66


METALLIC GREY




FOCUS-B

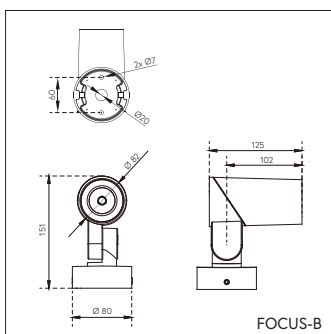

FOCUS-PK

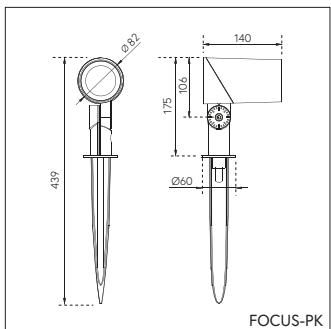

FOCUS-BRK

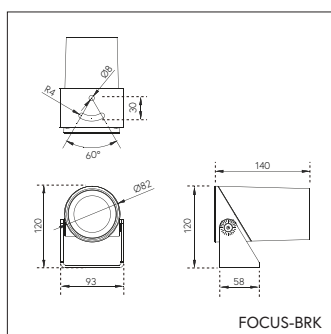


Prodotto: Proiettore LED da esterno
 Potenza: 10W
 Inclinazione: 90°
 Opzioni di installazione: Base (B) - Picchetto (PK), Staffa (BRK)
 Materiale: Pressofusione di alluminio e vetro temperato ad alto spessore
 Sorgente luminosa: Chip LED integrato
 CCT: 3000K - 4000K - 5000K / CRI >80
 Angolo di emissione: 6° - 15° - 20° - E (9°/39°)
 Flusso luminoso [WW]: 654 lm
 Finitura: Grigio metallizzato
 Grado di protezione IP: IP66
 Input: AC100-240V / 50-60Hz
 Controllo: On-Off
 Classe di isolamento: Classe I
 Dimensioni:
 FOCUS-B: 80 x H 151 x 125 mm
 FOCUS-PK: 82 x H 439 x 140 mm
 FOCUS-BRK: 93 x H 120 x 140 mm
 Certificazioni: CE - Conforme alla norma EN 60598-1 e relative note


Product: LED floodlight for outdoor
 Power: 10W
 Tilting: 90°
 Mounting options: Base (B) - Spike (PK), Bracket (BRK)
 Material: Die-casting aluminum and tempered high thickness glass
 Light source: Integrated LED chip
 CCT: 3000K - 4000K - 5000K / CRI>80
 Beam angle: 6° - 15° - 20° - E (9°/39°)
 Luminous flux [WW]: 654 lm
 Finish: Metallic grey
 IP rating: IP66
 Input: AC100-240V / 50-60Hz
 Control: On-Off
 Insulation class: Class I
 Dimension:
 FOCUS-B: 80 x H 151 x 125 mm
 FOCUS-PK: 82 x H 439 x 140 mm
 FOCUS-BRK: 93 x H 120 x 140 mm
 Certifications: CE - Compliant with EN 60598-1 and related notes



DATI FOTOMETRICI / PHOTOMETRIC DATA 3000K - 15°

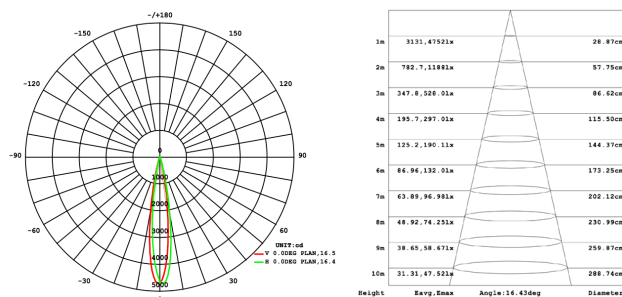

ANGOLO DI EMISSIONE / BEAM ANGLE



CODICE PRODOTTO

PRODUCT CODE

LL-FOCUS-X-X1-X2-X3-X4-X5

X INSTALLAZIONE / INSTALLATION: B - PK - BRK

X1 POTENZA / POWER: 10

X2 CCT: WW / NW / PW

X3 FINITURA / FINISH: G

X4 ANGOLO DI EMISSIONE / BEAM ANGLE: 6° - 15° - 20° - E

X5 CONTROLLO / CONTROL: S (on-off)

Revision date: 08/2021