


LL-POINT_UP

FARETTO DA INCASSO ANTIABBAGLIAMENTO A SOFFITTO CON BATTUTA

RECESSED DOWNLIGHT ANTI-GLARE WITH RIM




2 W



2 W


☐ ■ WHITE RIM AND BLACK INNER RING




Prodotto: Faretto da incasso a soffitto con battuta
 Potenza: 2W
 Materiale: Alluminio
 Sorgente luminosa: chip LED
 Ottica: Lente - ottica arretrata antiabbagliamento
 CCT: 2700K - 3000K - 4000K
 CRI>90
 UGR<10
 Flusso luminoso (WW): 130 lm
 Angolo di emissione: 15° - 24°
 Finitura: Bianco - Nero
 Grado di protezione IP: IP20
 Driver: Esterno, non incluso
 Input: DC 2.8 - 3.2 V / 700 mA
 Classe di isolamento: Classe III
 Dimensioni: Ø 40 x H 56 mm
 Foro installazione: Ø 34 mm
 Certificazioni: CE - Conforme alla norma EN 60598-1 e relative note

*Product: Ceiling recessed downlight with rim
 Power: 2W
 Material: Aluminum
 Light source: chip LED
 Optic: Lens - recessed optic anti-glare
 CCT: 2700K - 3000K - 4000K
 CRI>90
 UGR<10
 Luminous flux (WW): 130 lm
 Beam angle: 15° - 24°
 Finish: White - Black
 IP rating: IP20
 Driver: External, not included
 Input: DC 2.8 - 3.2 V / 700 mA
 Insulation class: Class III
 Dimension: Ø 40 x H 56 mm
 Cut: Ø 34 mm
 Certifications: CE - Compliant with EN 60598-1 and related notes*

DIMENSIONI / DIMENSION

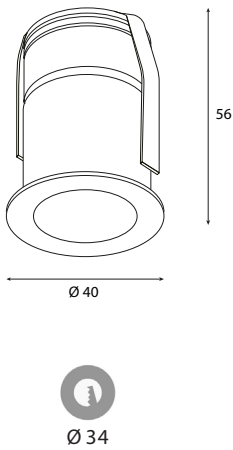

DATI FOTOMETRICI / PHOTOMETRIC DATA

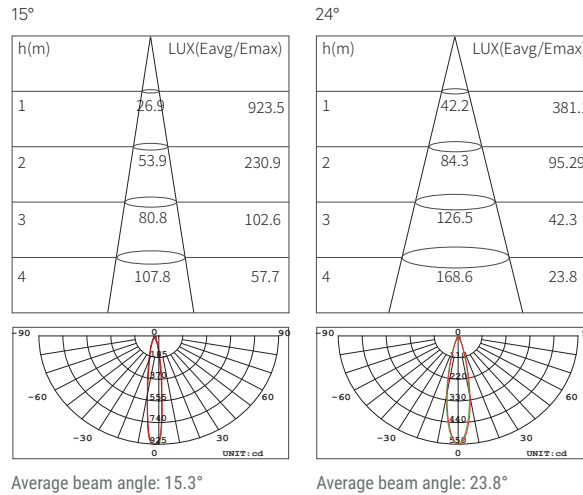

CODICE PRODOTTO

PRODUCT CODE

LL-POINT_UP-X-X¹-X²-X³

X POTENZA / POWER: 2

X¹ FINITURA / FINISH: W

X² CCT: SW - WW - NW

X³ ANGOLO DI EMISSIONE / BEAM ANGLE: 15° - 24°

Revision date: 08/2021