


# LL-SIDE 215

**SPOT LED ORIENTABILE A PARETE/SOFFITTO**  
WALL/CEILING ADJUSTABLE SPOTLIGHT





2 x 15 W

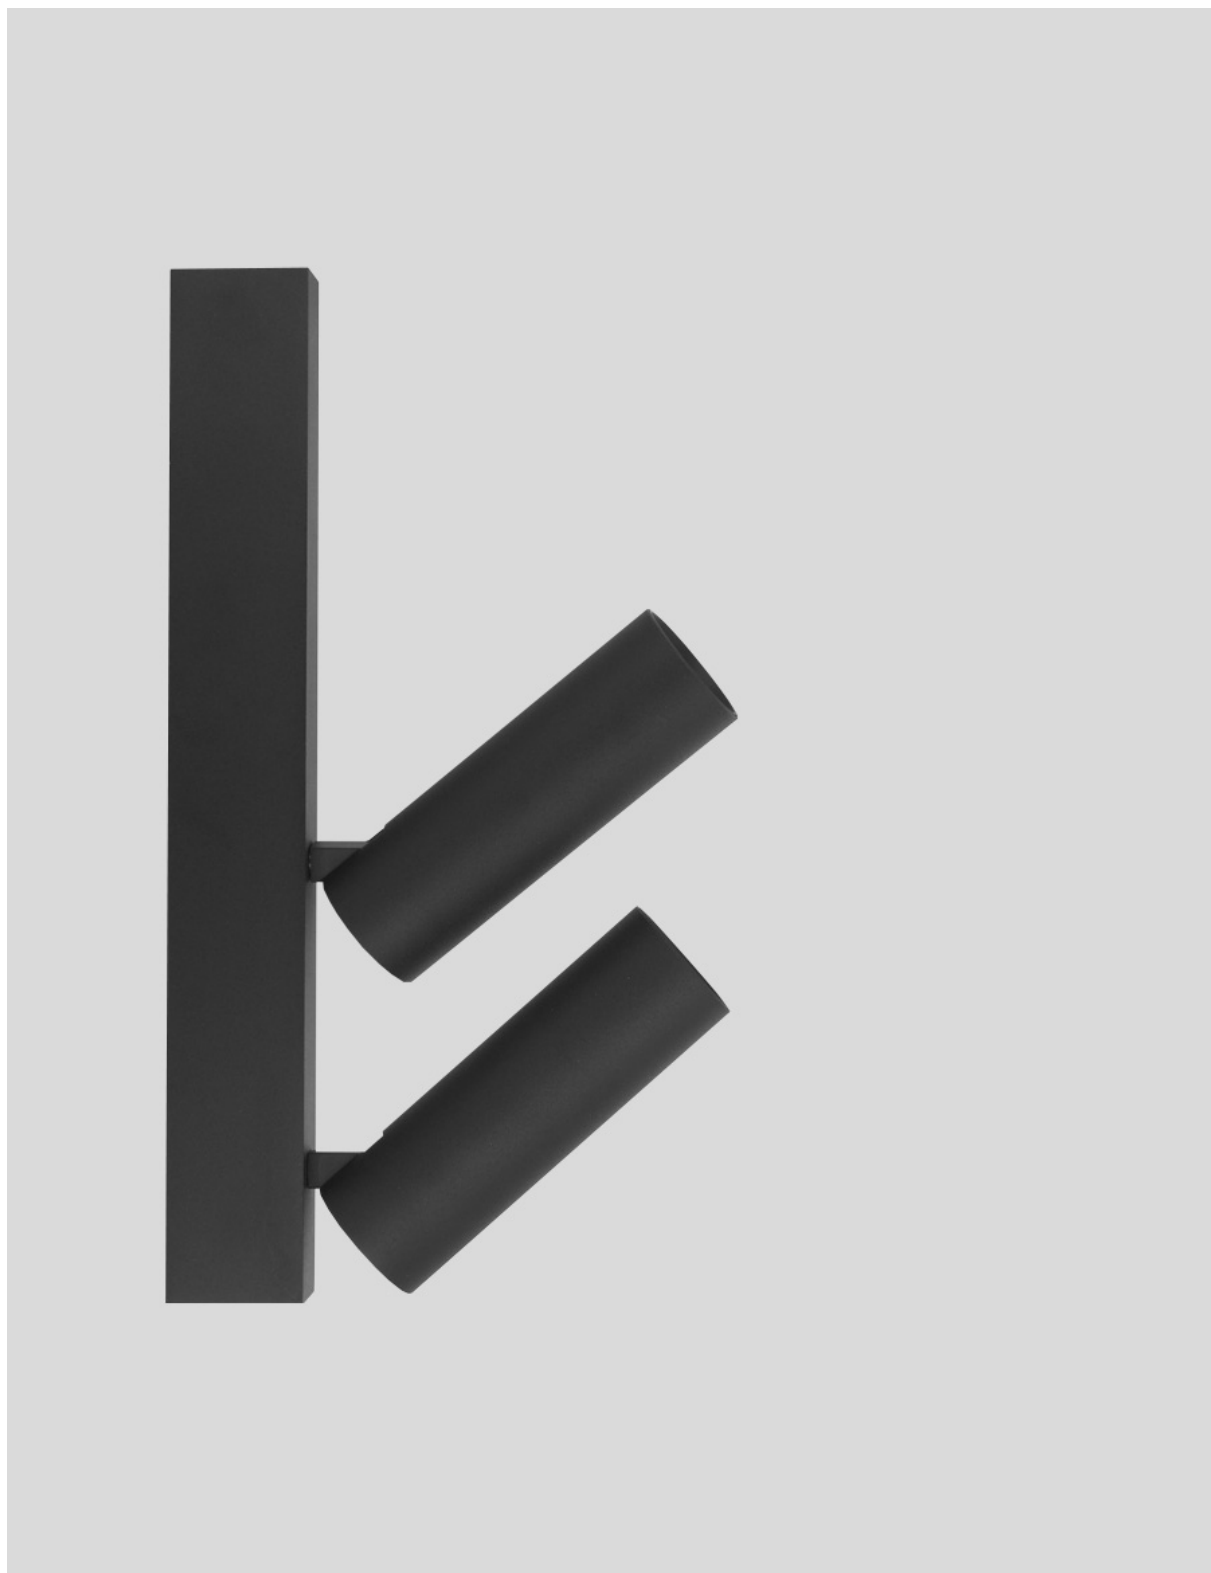



2 x 15 W


■ □ BLACK - WHITE




Prodotto: Spot a parete orientabile  
 Orientamento: 350°, Inclinazione 90°  
 Potenza: 2 x 15W  
 Materiale: Alluminio  
 Sorgente luminosa: COB LED  
 Ottica: Lente, ottica arretrata  
 CCT: 3000K - 4000K  
 CRI>90  
 Flusso luminoso (WW): 2\*1361 lm  
 Angolo di emissione: 24° - 36°  
 Finitura: Bianco - Nero  
 Grado di protezione IP: IP20  
 Driver: Integrato  
 Input: AC 220-240 V / 50-60Hz  
 Classe di isolamento: Classe I  
 Dimensioni spot: Ø 55 x 165 mm  
 Foro installazione: 250 x 54 x 33 mm  
 Certificazioni: CE - Conforme alla norma EN 60598-1 e relative note

*Product: Adjustable wall spot light  
 Adjustability: 350°, Tilting 90°  
 Power: 2 x 15W  
 Material: Aluminum  
 Light source: COB LED  
 Optic: Lens, recessed optic  
 CCT: 3000K - 4000K  
 CRI>90  
 Luminous flux (WW): 2\*1361 lm  
 Beam angle: 24° - 36°  
 Finish: White - Black  
 IP rating: IP20  
 Driver: Integrated  
 Input: AC 220-240 V / 50-60Hz  
 Insulation class: Class I  
 Dimension: Ø 55 x 165 mm  
 Base dimension: 250 x 54 x 33 mm  
 Certifications: CE - Compliant with EN 60598-1 and related notes*

## DIMENSIONI / DIMENSION

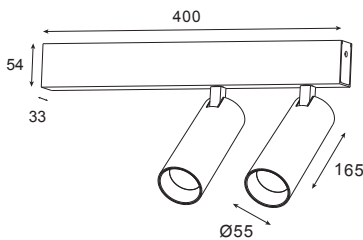

## DATI FOTOMETRICI / PHOTOMETRIC DATA

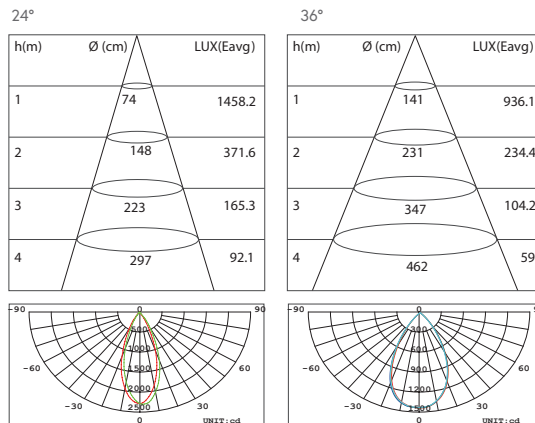

Spot: 1x15W

## CODICE PRODOTTO

PRODUCT CODE

LL-SIDE215-X-X<sup>1</sup>-X<sup>2</sup>

X FINISH: W - B

X<sup>1</sup> CCT: SW - WW - NW

X<sup>2</sup> BEAM ANGLE: 24° - 36°

Revision date: 07/2021

