


LL-TIITO 15



PROIETTORE LED A BINARIO TRIFASE
LED THREE-PHASE TRACK LIGHT

15W

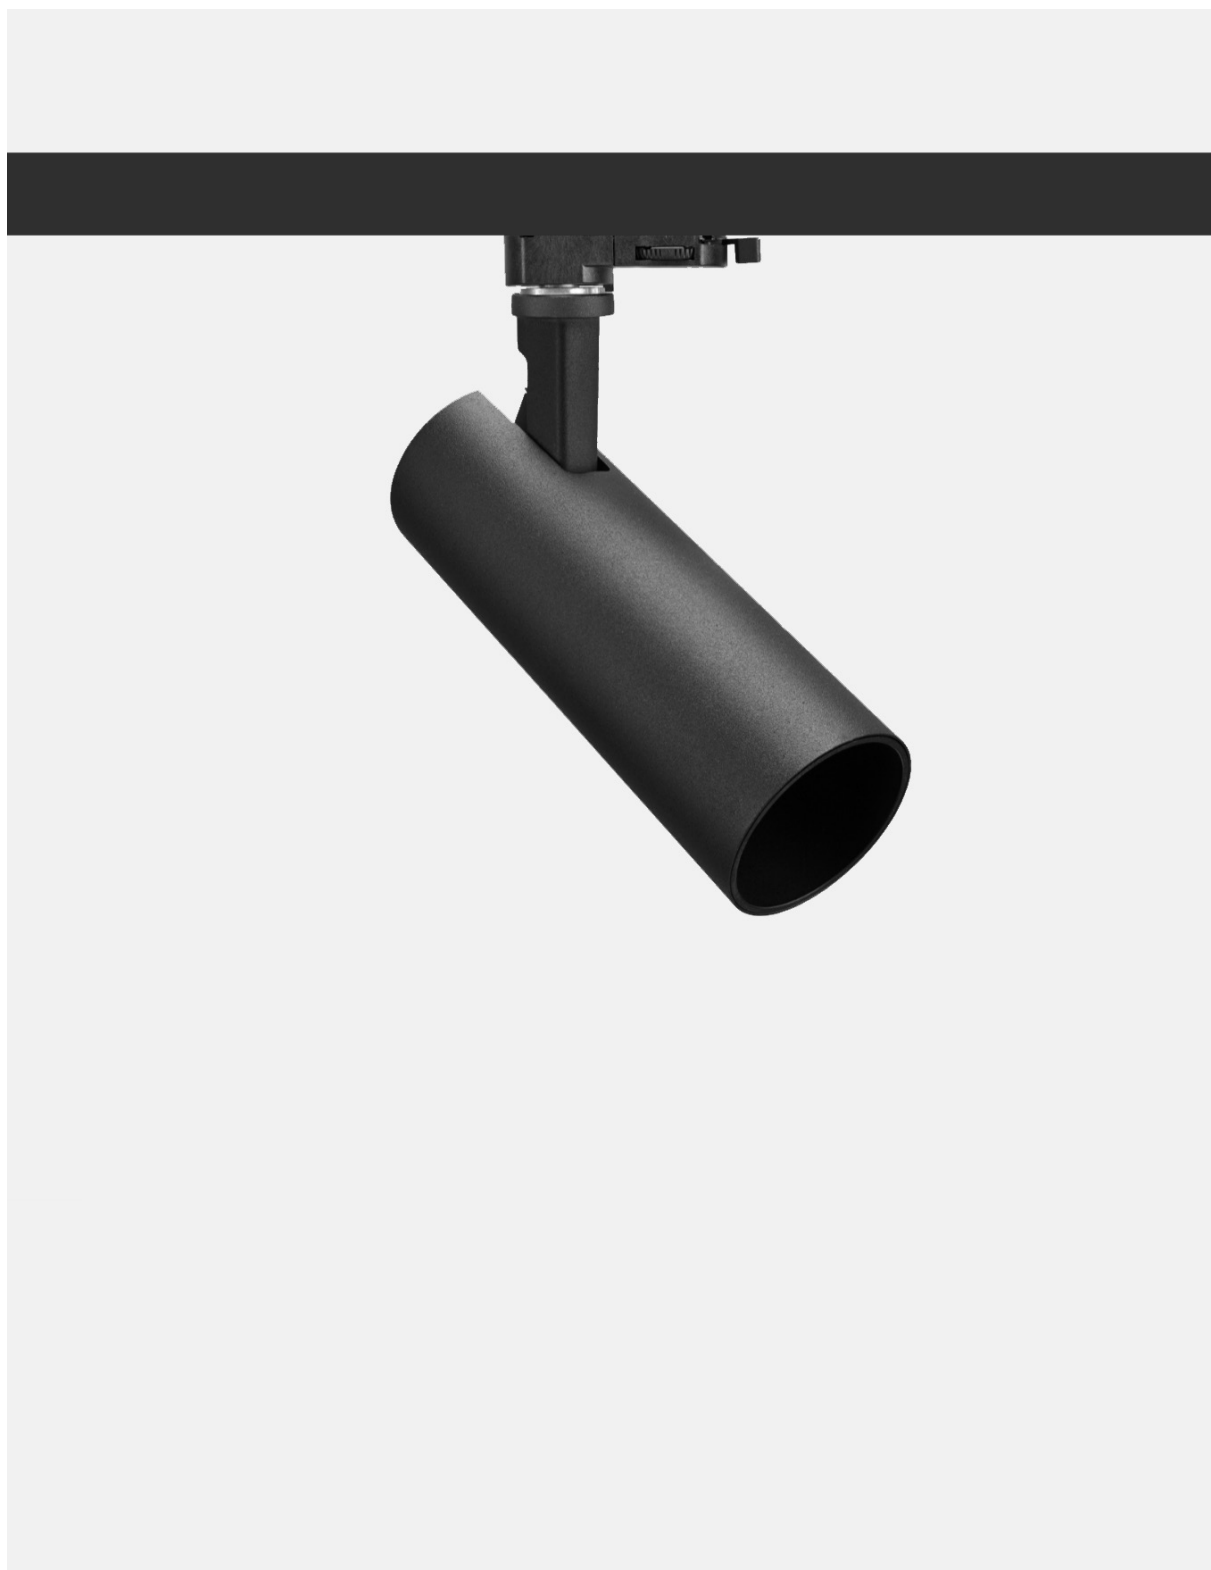


15W | Ø 60

■ □ WHITE - BLACK

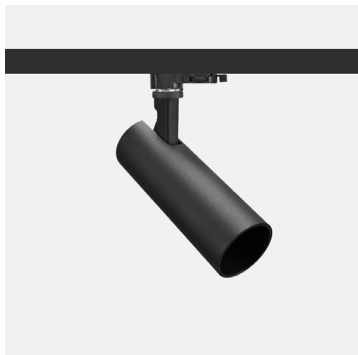

DIMENSIONI / DIMENSION

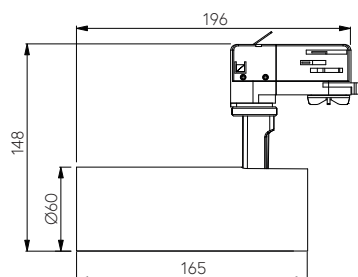

Prodotto: Proiettore LED a binario trifase
 Orientamento: 350° - Inclinazione: 90°
 Potenza: 15W
 Materiale: Pressofusione di alluminio
 Sorgente luminosa: COB LED
 Ottica: Lente in PMMA, ottica arretrata
 Accessori: Filtro nido d'ape anti-abbagliamento (HB)
 UGR<16
 CCT: 2700K - 3000K - 4000K
 CRI>90
 Flusso luminoso (WW): 925 lm
 Angolo di emissione: 12° - 25° - 42°
 Finitura: Bianco - Nero
 Grado di protezione IP: IP20
 Alimentatore: A bordo
 Controllo: On/off - DALI
 Input: AC 220-240 V / 50-60 Hz
 Classe di isolamento: Classe I
 Dimensioni spot: Ø 60 x 165 mm
 Temperatura di esercizio: -20° ÷ +40° C
 Certificazioni: CE - Conforme alla norma
 EN 60598-1 e relative note


Product: Three-phase track LED light
Adjustability: 350°, Tilting: 90°
Power: 15W
Material: Die-casting aluminum
Light source: COB LED
Optic: PMMA lens, recessed optic
Accessories: Honeycomb louver anti-glare (HB)
UGR<16
CCT: 2700K - 3000K - 4000K
CRI>90
Luminous flux (WW): 925 lm
Light Beam angle: 12° - 25° - 42°
Finish: White - Black
IP rating: IP20
Power supply: On board
Control: On/off - DALI
Input: AC 220-240 V / 50-60 Hz
Insulation class: Class I
Spot dimension: Ø 60 x 165 mm
Working Temperature: -20° ÷ +40° C
Certifications: CE - Compliant with EN 60598-1
and related notes



DATI FOTOMETRICI / PHOTOMETRIC DATA

12°


h(m)	Ø (m)	LUX(Eavg)
1	0.18	5254
2	0.27	2335
3	0.36	1313
4	0.54	583



Average beam angle: 13.4°

25°


h(m)	Ø (m)	LUX(Eavg)
1	0.32	2091
2	0.48	929
3	0.65	522
4	0.97	232



Average beam angle: 25.5°

42°

h(m)	Ø (m)	LUX(Eavg)
1	0.76	1438
2	1.52	359
3	2.29	159
4	3.05	89



Average beam angle: 42.5°

CODICE PRODOTTO

PRODUCT CODE

LL-TIITO-15-X¹-X²-X³-X⁴-X⁵

X POWER: 15

X¹ FINISH: W / BX² CCT: SW - WW - NWX³ BEAM ANGLE: 12° - 25° - 42°X⁴ ACCESSORIES: HB - Honeycomb louverX⁵ CONTROLLO - CONTROL: DA-DALI / N-On/off

Revision date: 08/2021