


LL-MICRO

MINI FARETTO DA INCASSO A SOFFITTO CON BATTUTA

LITTLE RECESSED DOWNLIGHT WITH RIM




1-2 W



1-2 W


☐ ■ WHITE - BLACK




Prodotto: Faretto da incasso a soffitto con battuta
 Potenza: 1-2W
 Materiale: Alluminio
 Sorgente luminosa: chip LED
 Ottica: Ottica arretrata in PMMA
 CCT: 2700K - 3000K - 4000K
 CRI>80
 Flusso luminoso (WW): 209 lm
 Angolo di emissione: 20° - 30°
 Finitura: Bianco - Nero
 Grado di protezione IP: IP44
 Driver: Esterno, non incluso
 1W: DC 2.8 - 3.2 V / 350 mA
 2W: DC 2.8 - 3.2 V / 700 mA
 Classe di isolamento: Classe III
 Dimensioni: Ø 22 x H 22 mm
 Foro installazione: Ø 16 mm
 Certificazioni: CE - Conforme alla norma EN 60598-1 e relative note

*Product: Ceiling recessed downlight with rim
 Power: 1-2W
 Material: Aluminum
 Light source: chip LED
 Optic: Recessed optic in PMMA
 CCT: 2700K - 3000K - 4000K
 CRI>80
 Luminous flux (WW): 209 lm
 Beam angle: 20° - 30°
 Finish: White - Black
 IP rating: IP44
 Driver: External, not included
 1W: DC 2.8 - 3.2 V / 350 mA
 2W: DC 2.8 - 3.2 V / 700 mA
 Insulation class: Class III
 Dimension: Ø 22 x H 22 mm
 Cut: Ø 16 mm
 Certifications: CE - Compliant with EN 60598-1 and related notes*

DIMENSIONI / DIMENSION

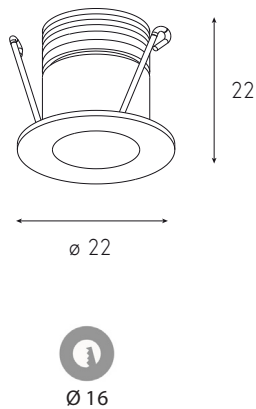

DATI FOTOMETRICI / PHOTOMETRIC DATA

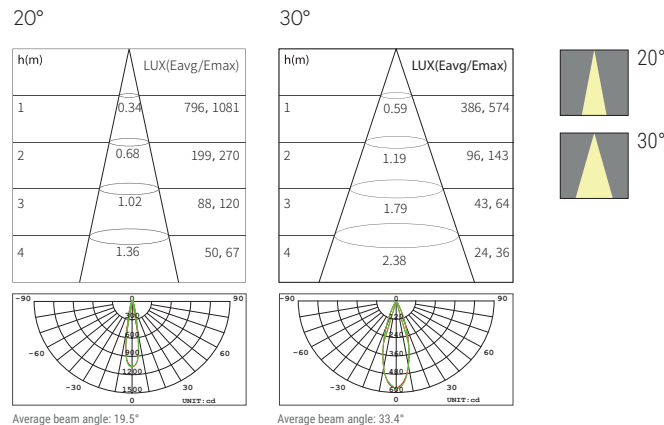

CODICE PRODOTTO

PRODUCT CODE

LL-MICRO-X-X¹-X²-X³

X POTENZA / POWER: 2

X¹ FINITURA / FINISH: W - B

X² CCT: SW - WW - NW

X³ ANGOLO DI EMISSIONE / BEAM ANGLE: 20° - 30°

Revision date: 12/2021