


LL-PLAT

PALETTO LED DA ESTERNI

LED BOLLARD FOR OUTDOOR

9W - 18W | IP65




9W - 18W | IP65

■ DARK GREY



DIMENSIONI / DIMENSION

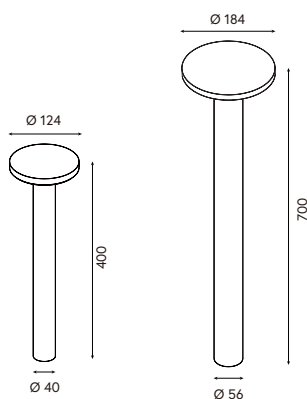

CODICE PRODOTTO

PRODUCT CODE

H400: LL-PLT-001-9-X¹-X²H700: LL-PLT-002-18-X¹-X²

X POTENZA / POWER: 9 - 18


X¹ CCT: SW - WW - NWX² ACC : BL - PK

Prodotto: Paletto LED
 Potenza reale: 8,5 W - 17,10 W
 Materiale: Alluminio e vetro temperato
 Installazione: Paletto - Picchetto
 Sorgente luminosa: LED SMD
 CCT: 3000K
 CRI>90
 Flusso luminoso apparecchio 9W: 469 lm
 Lamp luminous flux 18W: 1243 lm
 Finitura: Grigio scuro
 Grado di protezione IP: IP65
 Grado IK: IK08
 Driver: Integrato
 Input: AC 220-240 V / 50-60 Hz
 Classe di isolamento: Classe II
 Temperatura di esercizio: -20° ÷ 40° C
 Dimensioni
 Modello Small: Ø 124 x H 400 mm (Ø palo 40 mm)
 Modello Big: Ø 184 x H 700 mm (Ø palo 56 mm)
 Certificazioni: CE - Conforme alla norma
 EN 60598-1 e relative note


Product: LED bollard
 Real power: 8.5 W - 17.10 W
 Material: Aluminum and tempered glass
 Installation: Bollard - Spike
 Light source: LED SMD
 CCT: 3000K
 CRI>80
 Lamp luminous flux 9W: 469 lm
 Lamp luminous flux 18W: 1243 lm
 Finish: Dark grey
 IP rating: IP65
 Ik rating: IK08
 Driver: Integrated
 Input: AC 220-240 V / 50-60 Hz
 Insulation class: Class II
 Working Temperature: -20° ÷ 40° C
 Dimension
 Small type: Ø 124 x H 400 mm (Ø pole 40 mm)
 Big type: Ø 184 x H 700 mm (Ø pole 56 mm)
 Certifications: CE - Compliant with EN 60598-1
 and related notes



DATI FOTOMETRICI / PHOTOMETRIC DATA

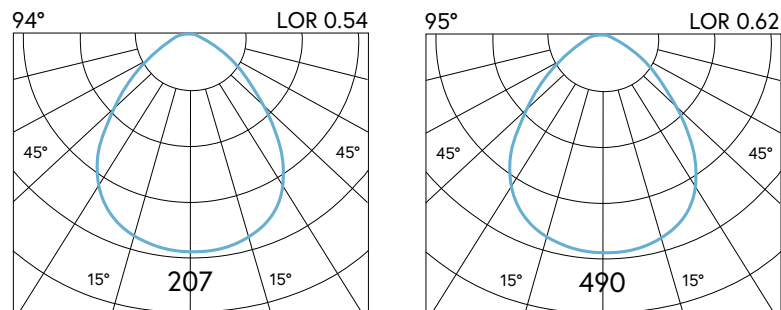

ACCESSORI / ACCESSORIES



BL | Gancio per ancoraggio in cemento
 Hook for anchoring in concrete



PK | Picchetto per installazione a terra
 Spike for ground installation

Revision date: 08/2025