

LL-INGROUND 7

FARETTO DA INCASSO A TERRA ANTI-ABBAGLIAMENTO

LED WALKABLE IN-GROUND LIGHT ANTI-GLARE

7W | IP67



7 W | IP67



■ ANODIZED BLACK



Prodotto: Faretto spot da incasso a terra
 Potenza: 7W
 Materiale: Corpo in alluminio tornito e vetro temperato
 Sorgente luminosa: Cob LED integrato
 CCT: 3000K - 4000K (ulteriori CCT su progetto)
 CRI >90
 Flusso luminoso (WW): 485 lm
 Ottica: Lente in PMMA
 Angolo di emissione: 24° - 36° - 60°
 Finitura: Nero anodizzato
 Grado di protezione IP: IP67
 Driver: Esterno
 Input: DC 18 - 22 V / 350 mA
 Classe di isolamento: Classe III
 Temperatura di esercizio: -20° ÷ 45° C
 Dimensioni: Ø 80 x H 71 mm
 Fornito con cassaforma, dimensioni: Ø 66 x H 107 mm
 Foro di incasso: Ø 60 mm
 Certificazioni: CE - Conforme alla norma EN 60598-1 e relative note


Product: In-ground spotlight
Power: 7W
Material: Turned aluminum and tempered glass
Light source: LED cob integrated
CCT: 3000K - 4000K (more CCT on project)
CRI>90
Luminous flux (WW): 485 lm
Optic: PMMA lens
Beam angle: 24° - 36° - 60°
Finish: Anodized black
IP rating: IP67
Driver: External
Input: DC 18 - 22 V / 350 mA
Insulation class: Class III
Working Temperature: -20° - 45° C
Dimension: Ø 80 x H 71 mm
Supplied with formwork, dimension: Ø 66 x H 107 mm
Cut-out: Ø 60 mm
Certifications: CE - Compliant with EN 60598-1 and related notes

DIMENSIONI / DIMENSION



* Su progetto è possibile ordinare i prodotti senza honeycomb
 * It is possible to order products without honeycomb on project

DATI FOTOMETRICI / PHOTOMETRIC DATA

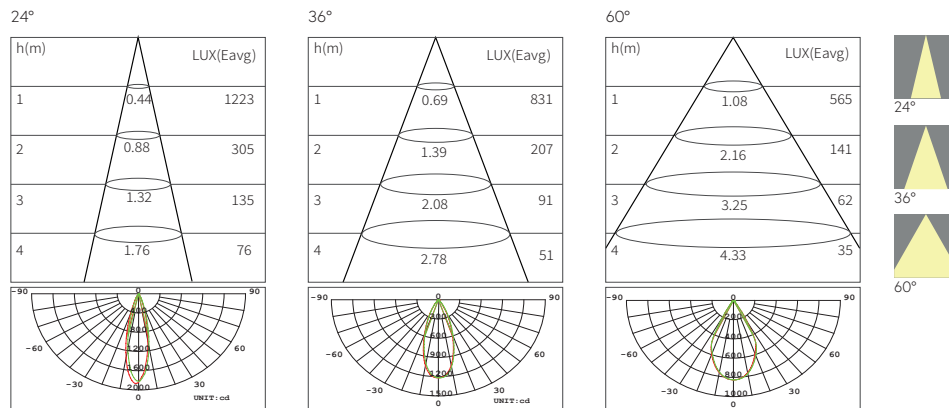

CODICE PRODOTTO

PRODUCT CODE

LL-INGROUND-X-X¹-X²-X³

X POTENZA / POWER: 7

X¹ FINITURA / FINISH: B

X² CCT: WW - NW

X³ BEAM ANGLE: 24° - 36° - 60°

Revision date: 07/2021